



Parts Manual

Mfg. No: 020323-1
2,550 PSI Craftsman


Model Components	Page
Main Unit.	4
Torque Specification Chart.	6

Not For
Reproduction

Main Unit

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 020323-1

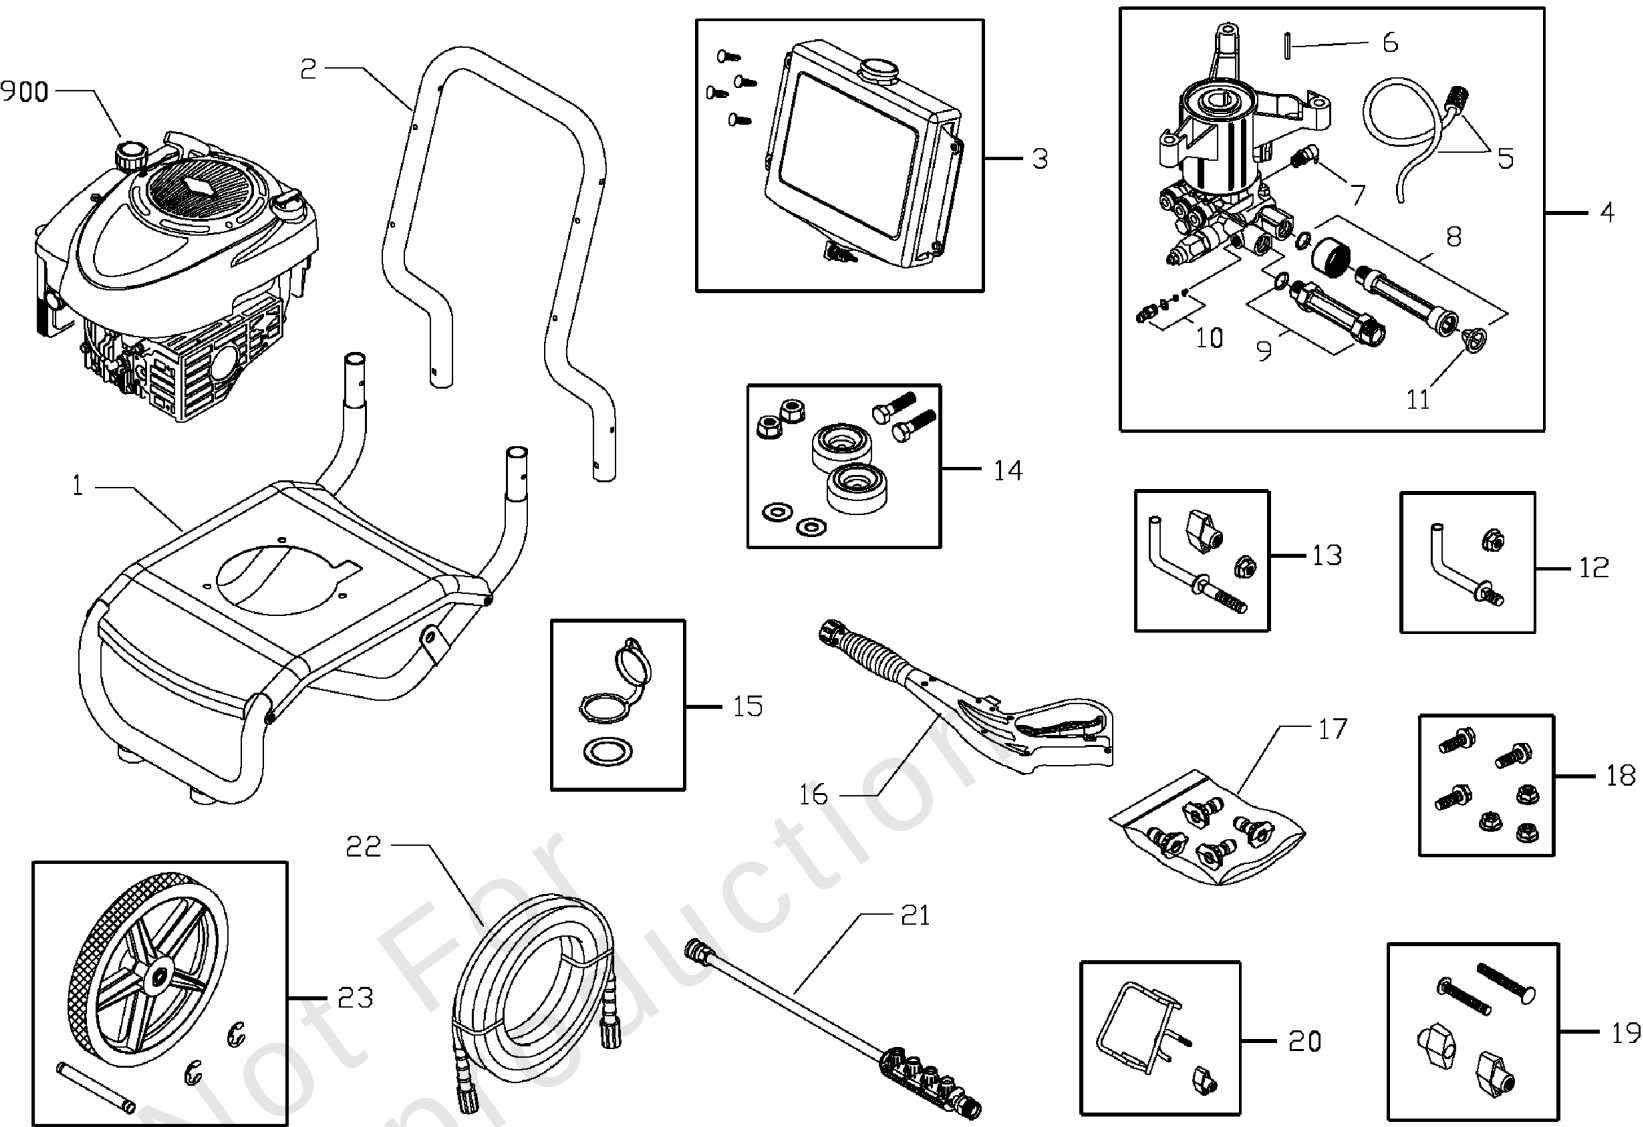

Main Unit

REF NO	PART NO	QTY	DESCRIPTION
1	200159GS		ASSY, Base
2	M202522GA		HANDLE
3	202364GS		ASSY, Chemical Tank With Decal & Clips
--	195964GS		CLIP
--	192980GS		KIT, Valve
4	202274GS		ASSY, Pump
5	189971GS		KIT, Chemical Hose
6	23139GS		KEY
7	194298GS		VALVE, Thermal Relief
8	201496GS		KIT, Water Inlet
9	201497GS		KIT, Outlet
10	192914GS		KIT, Hose Tail
11	B2384GS		FILTER, Inlet
12	192309GS		KIT, Hook, Base
13	194264GS		KIT, Hook, Handle
14	192310GS		KIT, Vibration Mount
15	199955GS		KIT, Cap
16	199117GS		GUN
17	200557GS		KIT, Nozzles
--	195983AEGS		NOZZLE, QC,Red
--	195983RGS		NOZZLE, QC,White
--	195983XGS		NOZZLE-QC YELLOW
--	1988441GS		NOZZLE, Plastic, Soap
18	203526GS		KIT, Pump Mounting Hardware
19	B2203GS		KIT, Handle Connector
20	201661GS		KIT, Gun Holder
21	192198GS		ASSY, Extension with Nozzle Holder
22	196006GS		HOSE
23	196439GS		KIT, Wheel
--	1925050GS		E-RING
--	203871GS		AXLE
900	-----		ENGINE
26	207718GS		MANUAL, Operator's
27	AB3061BGS		OIL BOTTLE
28	87815GS		GOGGLES
29	A104ORGS		Chemical Hose
30	790701		DECAL, Shroud
31	794693		LABEL, Warning
32	790703		COVER, Control
33	195015GS		KIT, Tag/Warning
34	191922GS		KIT, O-Ring Maintenance
35	7167300GS		HOUSE WASH CONCENTRATE
36	7167301GS		DECK WASH CONCENTRATE
37	7167302GS		VEHICLE/BOAT WASH CONCENTRATE
38	7167303GS		DEGREASER CONCENTRATE

Footnotes:

Optional Accessory

Hardware Identification & Torque Specifications

Torque Specification Chart								
FOR STANDARD METRIC MACHINE HARDWARE (Tolerance ± 20%)								
Property Class	 Class 5.6		 Class 8.8		 Class 10.9		 Class 12.9	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
M3	5.88	.56	13.44	1.28	19.2	1.80	22.92	2.15
M4	13.44	1.28	30.72	2.90	43.44	4.10	52.56	4.95
M5	26.4	2.50	60.96	5.75	5.97	8.10	7.15	9.7
M6	44.64	4.3	7.3	9.9	10.3	14	12.1	16.5
M7	5.2	7.1	12.1	16.5	16.9	23	19.9	27
M8	7.7	10.5	17.7	24	25	34	29	40
M10	15	21	35	48	50	67	59	81
M12	26	36	61	83	86.2	117	103	140
M14	42	58	101	132	136	185	162	220
M16	64	88	147	200	210	285	250	340
M18	89	121	202	275	287	390	346	470
M20	126	171	290	390	405	550	486	660
M22	169	230	390	530	559	745	656	890
M24	217	295	497	375	708	960	840	1140
M27	320	435	733	995	1032	1400	1239	1680
M30	435	590	995	1350	1401	1900	1681	2280
M33	590	800	1349	1830	1902	2580	2278	3090
M36	759	1030	1740	2360	2441	3310	2935	3980
M39	988	1340	2249	3050	3163	4290	3798	5150

The guides and ruler furnished below are designed to help you select the appropriate hardware.



Standard Hardware Sizing

When a washer or nut is identified as 1/2" (M8), this is the *Nominal size*, meaning the *inside diameter* is 1/2 inch (8mm metric thread diameter); if a second number is present it represents the *threads per inch* (distance between threads).

When bolt or capscrew is identified as 1/2 - 16 x 2" (M8 - 1.25 x 50), this means the *Nominal size*, or body diameter is 1/2 inch (8mm metric thread diameter), the second number, 16, represents the *threads per inch*, (*distance between threads*). The final number is the body length of the bolt or screw, 2 inches (50mm).

Torque Specification Chart						
FOR STANDARD MACHINE HARDWARE (Tolerance ± 20%)						
Hardware Grade	 SAE Grade 2		 SAE Grade 5		 SAE Grade 8	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
8-32	19	2.1	30	3.4	41	4.6
8-36	20	2.3	31	3.5	43	4.9
10-24	27	3.1	43	4.9	60	6.8
10-32	31	3.5	49	5.5	68	7.7
1/4-20	66	7.6	8	10.9	12	16.3
1/4-28	76	8.6	10	13.6	14	19.0
5/16-18	11	15.0	17	23.1	25	34.0
5/16-24	12	16.3	19	25.8	29	34.0
3/8-16	20	27.2	30	40.8	45	61.2
3/8-24	23	31.3	35	47.6	50	68.0
7/16-14	30	40.8	50	68.0	70	95.2
7/16-20	35	47.6	55	74.8	80	108.8
1/2-13	50	68.0	75	102.0	110	149.6
1/2-20	55	74.8	90	122.4	120	163.2
9/16-12	65	88.4	110	149.6	150	204.0
9/16-18	75	102.0	120	163.2	170	231.2
5/8-11	90	122.4	150	204.0	220	299.2
5/8-18	100	136	180	244.8	240	326.4
3/4-10	160	217.6	260	353.6	386	525.0
3/4-16	180	244.8	300	408.0	420	571.2
7/8-9	140	190.4	400	544.0	600	816.0
7/8-14	155	210.8	440	598.4	660	897.6
1-8	220	299.2	580	788.8	900	1,244.0
1-12	240	326.4	640	870.4	1,000	1,360.0

NOTES

- These torque values are to be used for all hardware excluding: locknuts, self-tapping screws, thread forming screws, sheet metal screws and socket head setscrews.
- Recommended seating torque values for locknuts:
 - for prevailing torque locknuts - use 65% of grade 5 torques.
 - for flange whizlock nuts and screws - use 135% of grade 5 torques.
- Unless otherwise noted on assembly drawings, all torque values must meet this specification.

Common Hardware Types



Wrench & Fastener Size Guide

 1/4" Bolt or Nut Wrench—7/16"	 5/16" Bolt or Nut Wrench—1/2"	 3/8" Bolt or Nut Wrench—9/16"	 7/16" Bolt or Nut Wrench (Bolt)—5/8" Wrench (Nut)—11/16"	 1/2" Bolt or Nut Wrench—3/4"
M6 Bolt or Nut Wrench—10mm	M8 Bolt or Nut Wrench—13mm	M10 Bolt or Nut Wrench—17mm	M12 Bolt or Nut Wrench—19mm	M14 Bolt or Nut Wrench—22mm

CRAFTSMAN®