

▲ WARNING Failure to read and follow the operator's manual and all operating instructions could result in death, serious injury, and/or property damage.

▲ WARNING Fuel and its vapors are extremely flammable and explosive which could cause burns, fire or explosion resulting in death, serious injury and/or property damage. Turn pressure washer engine OFF and let it cool at least 2 minutes before removing fuel cap. Let spilled fuel evaporate before starting engine. Always allow space for fuel expansion.

▲ WARNING High water pressure could cut through skin resulting in serious injury. Spray gun traps high water pressure, even when engine is stopped and water is disconnected. NEVER aim spray gun at people, animals, or plants. ALWAYS point spray gun in safe direction. Press red button and squeeze spray gun trigger to release high pressure, every time you stop engine.

▲ WARNING Risk of eye injury. Spray could splash back or propel objects resulting in serious injury. Always wear indirect vented (chemical splash) safety goggles marked to comply with ANSI Z87.1 when using or in vicinity of this equipment. NEVER substitute safety glasses or dry-condition goggles for indirect vented safety goggles.

1 Unpack the pressure washer

1. Remove everything from carton except pressure washer.
2. Ensure you have all included items prior to assembly. If items are damaged or missing, call 1-888-228-3068, do not return to store.
3. Open carton completely by cutting each corner from top to bottom. See Figure 1.



Figure 1

2 Assemble the handle

1. Slide handle onto two upright posts (A).
2. Insert two carriage bolts toward engine side as shown in Figure 2 through holes at bottom of handle. Fully tighten with two plastic knobs.
3. Store accessories as shown in overview.



Figure 2

3 Add oil and fuel

NOTICE You MUST properly fill engine with oil before attempting to start pressure washer.

NOTICE DO NOT use E85 fuel.

NOTICE DO NOT mix oil with fuel.

1. Move pressure washer outdoors to a flat, level surface.
2. Remove oil fill cap (B). Slowly pour supplied oil into oil fill.
3. Replace and fully tighten oil fill cap.
4. Remove fuel cap (C). See Figure 3. Add clean, fresh, UNLEADED fuel. Allow space in fuel tank for fuel expansion.
5. Replace fuel cap. Let any spilled fuel evaporate before starting engine.

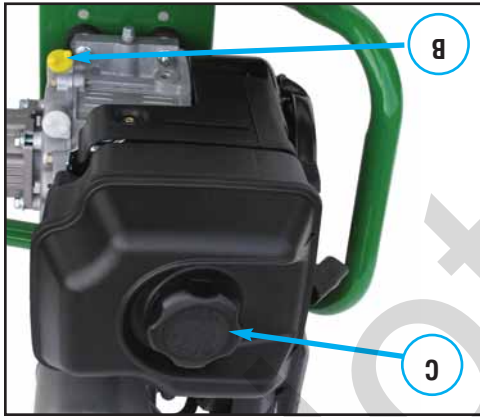


Figure 3

4 Move the pressure washer to a safe operating location

▲ WARNING Running engine gives off carbon monoxide, an odorless, colorless, poison gas. Breathing carbon monoxide could result in death, serious injury, nausea or fainting. Operate this product ONLY outdoors. DO NOT operate this product inside any building or enclosure, even if windows and doors are open.

1. Move pressure washer outdoors to a flat, level surface. Running engines give off carbon monoxide. See Figure 4 for operating location.
2. Keep at least 5 feet (1.5 m) clearance on all sides of pressure washer, including overhead, to reduce the risk of exhaust heat or exhaust gases igniting nearby combustible material.

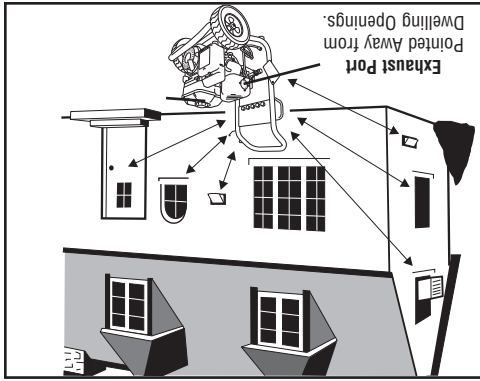


Figure 4

5 Connect the spray gun

1. Attach high pressure hose to spray gun. See Figure 5. Pull back on collar of quick-connect fitting on hose, insert spray gun and release collar. Tug on high pressure hose to make sure it is securely in place.
2. Remove and discard two shipping caps from high pressure outlet and garden hose inlet connections.
3. Uncoil high pressure hose and attach to high pressure outlet. See Figure 6. Tug on high pressure hose to make sure it is securely in place.



Figure 5

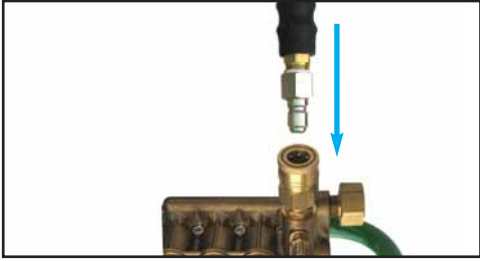


Figure 6

6 Connect the water supply

1. Inspect garden hose water inlet screen (D) for damage. See Figure 7. Clean screen if necessary. Refer to Operator's Manual for instructions.
2. Run cold water through garden hose for 30 seconds to clean out any debris. Garden hose length must not exceed 50 feet.
3. Turn off water supply and attach garden hose to water inlet. Tighten by hand. See Figure 7.

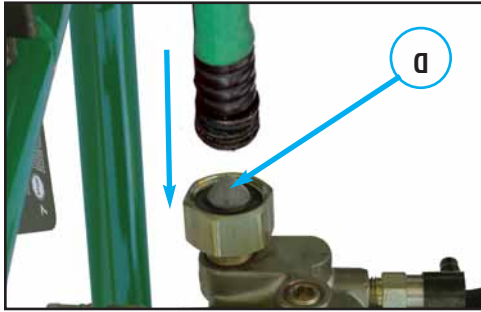


Figure 7

7 Start the pressure washer

NOTICE You MUST connect and turn on water supply fully before starting engine.

▲ WARNING Risk of eye injury. Spray could splash back or propel objects resulting in serious injury. Always wear indirect vented (chemical splash) safety goggles marked to comply with ANSI Z87.1 when using or in vicinity of this equipment. NEVER substitute safety glasses or dry-condition goggles for indirect vented safety goggles.



Figure 8



Figure 9

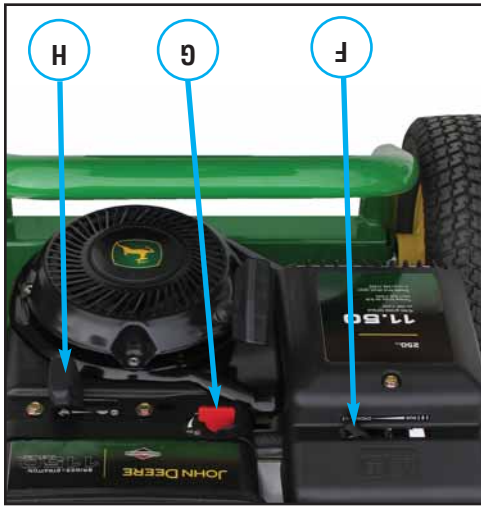


Figure 10

▲ WARNING Starter cord kickback (rapid retraction) will pull hand and arm toward engine faster than you can let go which could cause broken bones, fractures, bruises, or sprains resulting in serious injury. NEVER pull starter cord without first relieving spray gun pressure. Pull starter cord slowly until resistance is felt, then pull rapidly. Firmly grasp spray gun with both hands when using high pressure spray to avoid injury when spray gun kicks back.

When starting engine, hold top of fuel tank with left hand. See Figure 12. With your right hand, pull cord slowly until resistance is felt and then pull rapidly to avoid kickback. After each starting attempt, where engine fails to run, always point gun in safe direction and push trigger lock (red button) (Figure 8, E) and pull trigger on spray gun to release high pressure. Move choke lever (F) to CHOKE position. See Figure 11. Move fuel valve (G) to ON position. See Figure 11. Move throttle lever (H) to FAST (🔥) position. See Figure 11. Point gun toward surface to be cleaned. Push trigger lock (red button) (Figure 8, E) and pull trigger to begin spraying.

8 Stop the pressure washer

1. Let engine idle for two minutes.
2. Move fuel valve (Figure 11, G) to OFF position.
3. Move throttle lever (Figure 11, H) to SLOW (🐢) position, then STOP (🛑) position. Turn off water supply.
4. Point spray gun in safe direction, push trigger lock (red button) (Figure 8, E), and pull trigger to relieve retained high water pressure.
5. Disconnect garden hose from pump.
6. Disconnect high pressure hose from pump and gun for storage.
7. For long term storage, see Operator's Manual.
8. Remove safety goggles.

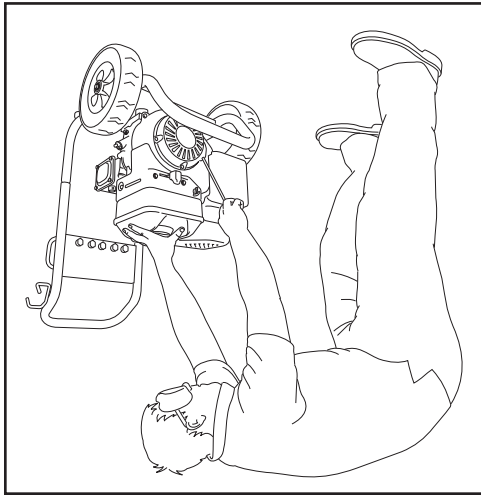


Figure 11

Items that you will need

- Unleaded Fuel (minimum 87 octane)
- Utility Knife
- Oil Funnel (optional)
- Garden Hose, 50 feet or less
- Safety Goggles (indirect vented type)

Items Included

- Quick Connect Spray Tips
- Carriage Bolts
- Plastic Knobs
- Handle • Oil Bottle • Operator's Manual



